


View G

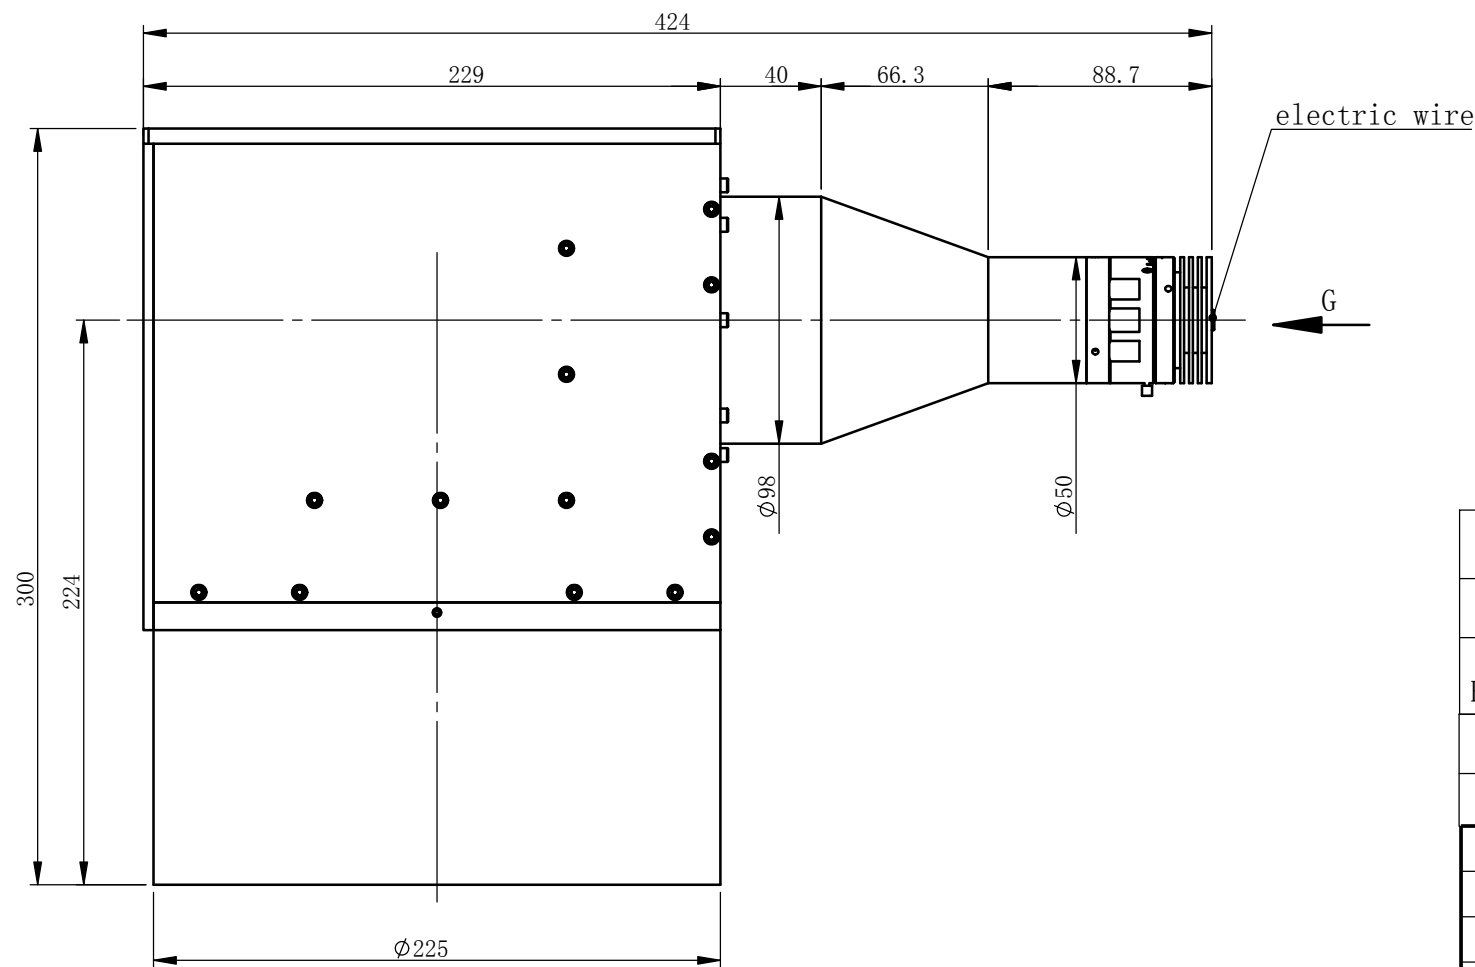

XF-PTI195-L90-(C)

Specifcaiton

Rated Power : 5W
 Rated Voltage : 24V
 Max Current : 208mA
 Beam Diameter : $\Phi 195\text{mm}$
 Working Distance : $508 \pm 254\text{mm}$ (Diameter of diaphragm: 4mm)
 Aperture Angle:

Diameter of diaphragm(mm)	1	2	3	4	5	6	7	8	9	10
NA	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009	0.010
Aperture Half-angle(°)	0.06	0.11	0.17	0.23	0.28	0.34	0.39	0.45	0.51	0.56

File Name	Light Source Colour(C)				
XF-PTI195-L90-(C)	R	G	B	W	

Undefined tolerance (mm)	degree	File Name				
X.X	± 0.2	$\pm 30\text{min}$	XF-PTI195-L90-(C)-外形尺寸-EN			
X.XX	± 0.02	Drawing Name				
X.XXX	± 0.005	Drawing Size: A3				
	Sign	Data/Ver.	Material	Ratio	Product Name	
Design				1:5		
Modify1			Qty		Canrill OPTICS	
Modify2			Total:	Page:	All design and drawings are intellectual property of Canrill Optics, can not be copied without Canrill's authorization.	